

QP Code : 24003

[3 Hours]

[Total Marks : 80]

- N.B :**
1. Question No. 1 is **compulsory**.
 2. Answer any four questions from the remaining.
 3. Assume suitable data if necessary.
 4. Answer of the sub-questions of an individual questions should be grouped and written together.

1. (a) Discuss in brief about an overview of control system design ? 5
 (b) (i) Derive the dynamic model of stirred tank heating process, assuming constant hold up and perfect mixing. 10
 (ii) Classify the variables and carryout a degrees of freedom analysis.
 (c) Explain Gain margin and phase margin. 5
2. (a) A two tank mixing process is initially operating under steady state conditions, with a volumetric flow rate of $2\text{m}^3/\text{min}$ of a solution. The solute concentration is $1\text{kg}/\text{m}^3$. The volume of the first tank is 4m^3 and that of the second tank is 6m^3 . At time $t = 0$, the solute concentration in the inlet to the first tank suddenly increases to $2\text{kg}/\text{m}^3$. How long does it take for the solute concentration in the outlet from the second tank to reach $1.6\text{Kg}/\text{m}^3$. 10

(b) 10




Derive the transfer function $\frac{H}{Q}$ for the liquid level system shown in fig. The resistance are linear. H and Q are deviation variables. You are expected to give numerical values in the transfer functions.

3. (a) What conditions must be satisfied by a two tank non-interacting system to exhibit a critically damped response. 5

[TURN OVER]

✓(b)

10

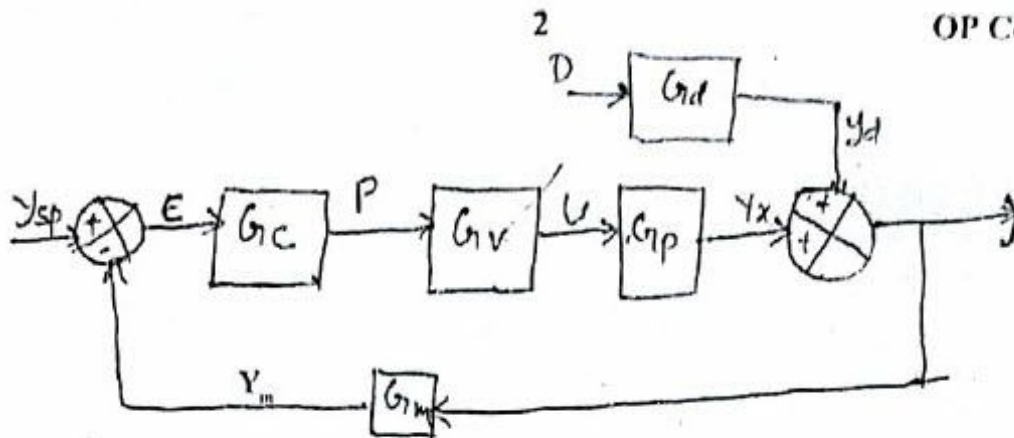

Block diagram for Control system

Consider the feedback control system shown in figure above with the following

transfer functions : $G_c = K_c$, $G_v = \frac{1}{2s+1}$, $G_p = G_d = \frac{1}{5s+1}$, $G_m = 1$. Determine the range of K_c values that result in a stable closed loop system.

- (c) A second order system is found to have a peak amplitude ratio of 1.1547 at a frequency of 0.7071 rad/min. What are the values of time constant and the damping coefficient of the system. 5

- ✓(a) A unity feed back system has 15

$$G(s) H(s) = \frac{80}{s(s+2)(s+20)}$$

Draw the Bode plot. Determine the G.M., P.M., w_{gc} , w_{pc} . Comment on the stability?

- (b) Discuss the guidelines for the selection of controlled manipulated and measured variables. 5

- ✓(a) Discuss the continuous cycling method for online controller tuning. 10
 (b) Write down the rule for plotting root locus diagram. 5
 (c) Discuss in brief control valve characteristics. 5

- ✓(a) The following response was obtained from a dynamic system when a step of magnitude 0.2 was introduced. 10

Time	Response
0	0.00000
5	0.001757
10	0.025273
15	0.088674
20	0.178158
25	0.268563
30	0.343173
35	0.396964
40	0.432176
45	0.453617

Finally the response approaches constant value of 0.4798 after a long time. Use the data to fit the first order plus dead time model to the systems.

- (b) Explain Niquist - stability criteria in detail. 10